




We Speak DIESEL...since 1971

800-343-7351

FIRE PUMPS - Diesel Fire Pumps


Diesel America West's maritime heavy service, self priming, centrifugal fire pumps feature quality usually found in heavier and more expensive units. As superstars in the pump world, these pumps are assembled using the finest components available. The Yanmar "L" series diesel, a popular and proven lightweight 4-cycle air cooled engine, is coupled to the super tough, certified, saltwater USCG rated fire pump. Excellent for use where higher pressures and general pumping requirements are needed.

Together these units combine to make a serious high performance diesel fire pump that provides the user with easy starting, reliable service, excellent fuel economy, with engine and pump life many times greater than gasoline powered units. All in all, a lightweight, rugged, diesel fire pump that works and doesn't break.

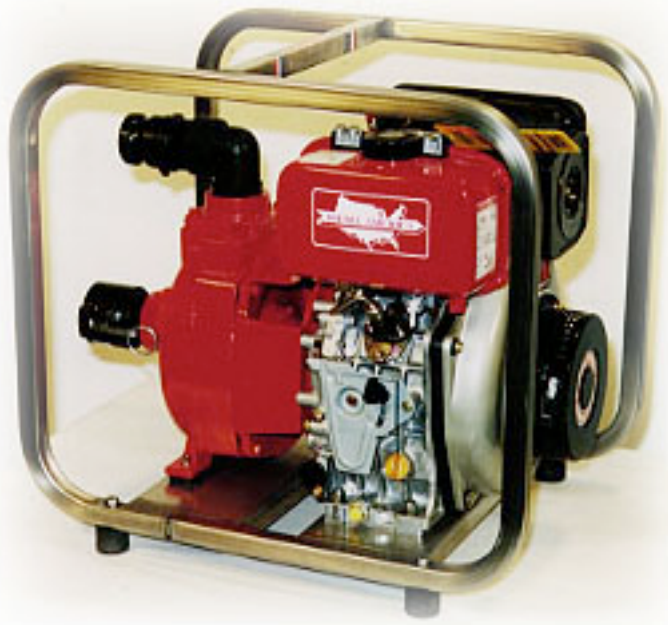


Special Features

- Tig welded, 1" stainless steel, #304 square tube roll cage frame
- Variable speed governor allowing pump speed to match the job
- Long life oil-resistant salt water rated internal parts with built in check valve
- Easy recoil starting with auto compression release and self fuel bleed feature
- Stainless steel drive sleeve with self adjusting, severe service, s/s and viton shaft seal
- Replaceable suction valve with stainless steel weights
- Utilizes 2" NPT suction and discharge flanges and gaskets
- Extra tough anti-vibration isolators, and nonskid feet

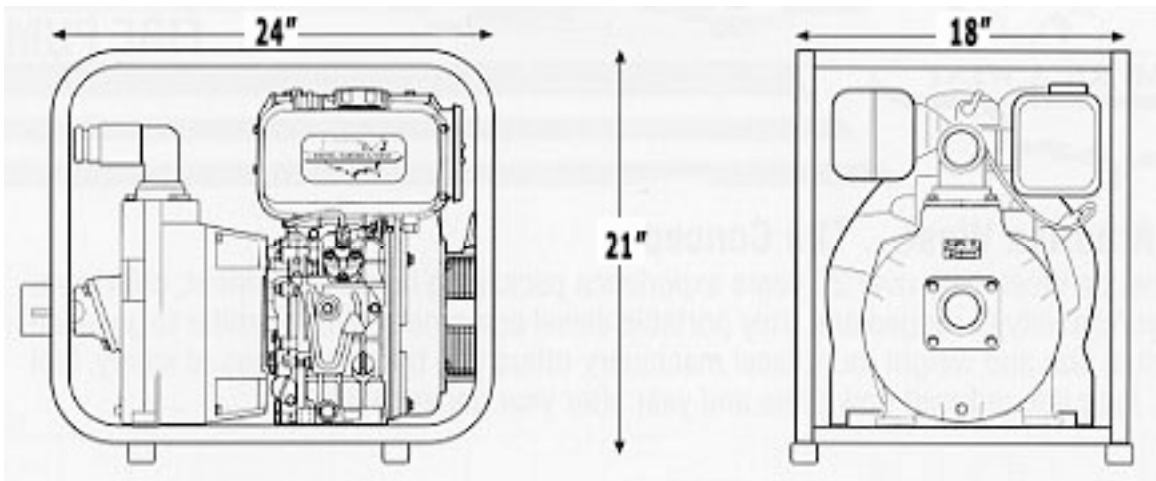

PUMP SPECIFICATIONS	
Loadstar Model	DPL70-HHLF
Suction & discharge	2" FEM-NPT
Maximum flow	150 GPM
Pressure (max.)	90 PSI
Suction lift (max.)	25 FT
Spherical solids (in.)	.28
Seal	Severe Service Type-21 Stainless Steel & Viton
Housing	Cast Iron Class 30 or Bronze
Impeller	Bronze
ENGINE SPECIFICATIONS	
Model	Yanmar L-70 AE
Combustion system	Direct Injection
Displacement cc (cu.in.)	296 (18.06)
Bore x stroke mm (in.)	78X62 (3.07X2.44)
Engine speed maximum	3600
Output HP	7.0
Fuel tank cap. L. (gal.)	3.5 (0.92)
Lube oil cap. L. (gal.)	1.1 (0.29)
Starting System	Recoil
DIMENSIONS	
Dry weight (pounds)	148
Length	24"
Width	18"
Height	21"

Performance Specifications

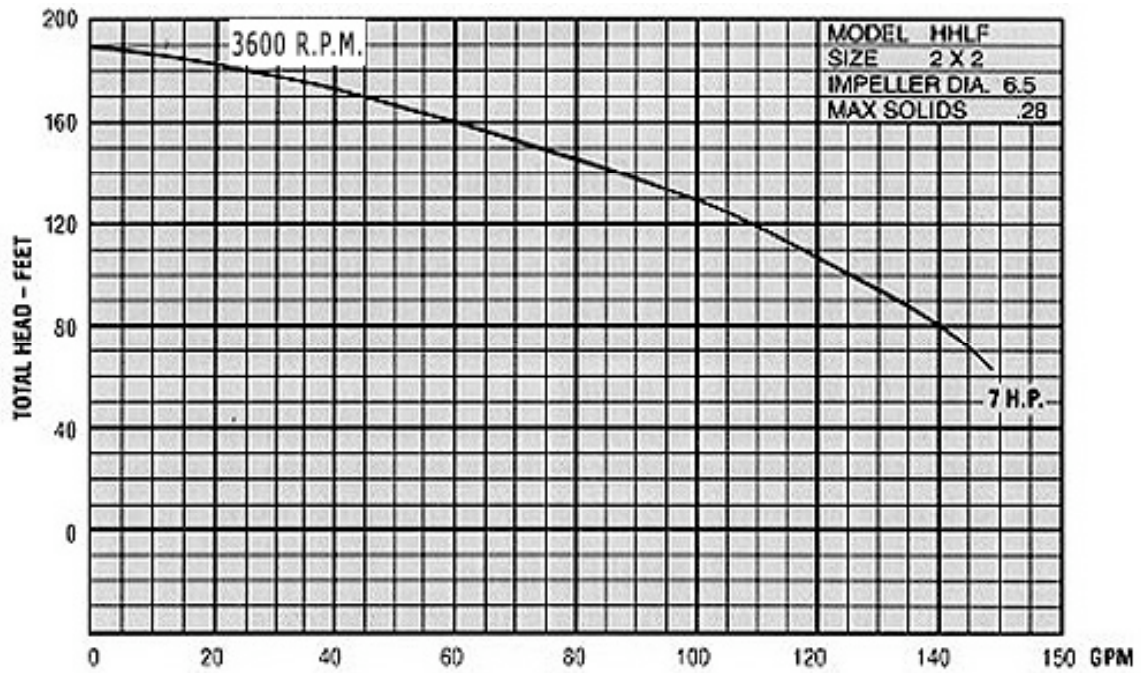

Call or write us today for more information!

Contact us at:

Diesel America West
Post Office Box 968
Friday Harbor, WA 98250

800-DIESEL-1 • 360-378-4182 • FAX: 360-378-3315

dawest@rockisland.com

Manufacturers of Quality Diesel Equipment

www.dawest.com